

ICCIFAM

Managing Assets and Infrastructure in the
Chaotic Global Economic Competitiveness

ISSN : 2302-9013

P
R
O
C
E
E
D
I
N
G



**International Conference on Construction Industry,
Facilities and Asset Management
November 22-23, 2012, Padang - Indonesia**



FACULTY OF
ENGINEERING



CENTER FOR INNOVATION STUDIES
ANDALAS UNIVERSITY



LPJK-P
SUMBAR



DISASTER STUDY CENTRE
ANDALAS UNIVERSITY



CENTRE ENERGY STUDIES
ANDALAS UNIVERSITY



CENTRE FOR
INFRASTRUCTURE
AND SPACE UTILITY
ANDALAS UNIVERSITY



UTM
UNIVERSITI TEKNOLOGI MALAYSIA



Sejak 1910

Secretariat :

- 1. Faculty of Engineering, Andalas University. Padang 25163-Indonesia
Phone: 0751-72497**
- 2. West Sumatera Lembaga Pengembangan Jasa Konstruksi (LPJK-P)
Provinsi Sumatera Barat, Jalan Taman Siswa No. 1 Padang
Telepon: 0751-7053631
Website: <http://ft.unand.ac.id/iccifam>
<http://lpjksumbar.net/iccifam>
Email: iccifam2012@gmail.com**



9 772 302 901 002

EDITORS:

Insannul Kamil

Rika Ampuh Hadiguna

Buang Alias

Abdul Hakim Mohammed

Richard Reed

Adek Tasri

Rendy Thamrin

Nilda Tri Putri

PREFACE

Ladies and gentlemen,

First of all, I would like to say thank you for all involved and related parties, especially the steering committees who have spent their times and energy, and even their money for the success of this event: International Conference on Construction Industry, Facilities and Asset Management (ICCIFAM). We are also proud of the job done by the Faculty of Engineering, Andalas University who have succeeded to invited some other countries to participate in the event.

I would also say thank you for attending and participating for this program, especially all speakers who will contribute their views, thoughts, and ideas on the topic of this conference.

This event is held as a part of our programs in celebrating 56th anniversary of Andalas University. We plan to hold this event every year. I hope the conference is getting better over time. And many related parties related to the topic get involved and participated in this event. Even though, we would like to develop more to any discipline or field of studies existing in Andalas University.

Last but not least, thank you for your participation and contribution. And happy conference. Hope the conference generates positive inputs for all of us.



*Dr. H. Werry Dartat Taifur, SE, MA
Rector of Andalas University*

PREFACE

Ladies and gentlemen,

I am very happy for your coming to this conference room, to Faculty of Engineering, Andalas University in order to participate and contribute in this program: International Conference on Construction Industry, Facilities and Asset Management.

Again, I say: Welcome to the conference.

Beforehand, I would like to say thank you for all parties who have given supports and contribution, so that the program can be held. Especially, for the steering committees who prepare and arrange this event, I say thank you. Keep up your good job!

The theme of this conference is: Managing assets and infrastructure in the chaotic global economic competitiveness. So, we really hope your contribution in this conference in appropriate to the theme.

This event is held in order to promote, increase, and contribute to the scientific world and workplace. For scientific world, as we all know that science is developing over time, it makes the needs for fostering and discussing it. This event is one of the ways to foster and discuss it so that the development of science, especially in the field of construction industry, facilities and asset management can be done and achieved. For Faculty of Engineering, Andalas University, this program is one of our contributions to the world of science.

I hope, we all can participate in this program. And again, thank you. Let's spend our time in this conference.



*Prof. Dr.-Ing Hairul Abral
Dean of Engineering Faculty,
Andalas University*

PREFACE

Ladies and gentlemen,

On this occasion, we would like to say thank you for inviting to and involving us in the beneficial program: International Conference on Construction Industry, Facilities and Asset Management (ICCIFAM). We are so proud to be part of and to be involved in this conference.

We are from West Sumatera Construction Services Development Board welcoming this program. That is why, we support, take part, and contribute as much as we can in order to hold that event. As an institute in the field of construction, we really need this event to development and increase our views and insights. This event is really valuable for us. There have been new developments in constructions in the world that we need so as to be able to apply in our daily job. In this conference, this moment we can have it. West Sumatera Construction Services Development Board really appreciates this event. So, we come and take part.

West Sumatera Construction Services Development Board hopes, through this event, we all can do and realize sustainable development as well as green development.

Thank you.



*Ir. Muhammad Dien Dt.
Tumanggung
Chairman of West Sumatera
Construction Services Development
Board (LPJK-P Sumbar)*

PREFACE

Ladies and gentlemen,

This is an happy moment for all of us. We can be here together, talking and discussing about construction and facilities asset management. We say thank you for all parties who have supported and contributed in this event: International Conference on Construction Industry, Facilities and Asset Management (ICCIFAM).

The conference we hold, we had faced so many barriers and problems that one by one we can settle. Now, we are really happy, we can hold this event.

We have been contacted by some experts and prospective participants from all over the countries, whether to be a speaker and participant. In addition to the local participants, the participants of the conference come from some countries in the world. They come, take part, and contribute their views and insights about construction industry, facilities and asset management.

We say thank you to sponsors, donators and all parties who have contributed and donated so that the event can be held. We realize we really need this event in order to achieve and do sustainable development. We all know that constructions and facilities asset management play an important role in achieving and realizing sustainable development. So, this event is crucial and urgent.

We hope, this conference is running as we all want. Thank you.



*Ir. Insannul Kamil, M. Eng, IPM
Organizing Chairman*

TABLE OF CONTENTS

Preface from Rector of Andalas University <i>Dr. H. Werry Dartta Taifur, SE, MA</i>	i
Preface from Dean of Engineering Faculty, Andalas University <i>Prof. Dr-Ing. Hairul Abral</i>	ii
Preface from Chairman of West Sumatera Construction Services Development Board (LPJK-P Sumbar) <i>Ir. Muhammad Dien Dt. Tumanggung</i>	iii
Preface from Organizing Chairman <i>Ir. Insannul Kamil, M. Eng, IPM</i>	iv
Table of Content	v

PAPERS

1	Occupiers As the Critical Stakeholder In Sustainable Buildings International Conference On Construction Industry, Asset And Facilities Management <i>Richard Reed, Junaidah Jailani</i>	1
2	Valuation Terminology Standardisation to Implement Mass Appraisal at Local Authorities for an Integrated Green Computing Environment in Malaysia <i>Chitrakala Muthuveerappan, Buang Alias, Mohd Shafie</i>	13
3	Post Occupancy Evaluation: The Need for Awareness and Knowledge for Continuous Improvement of Building Performance <i>Izran Sarrazin Mohammad</i>	31
4	A Successful and Substantial Nonstructural Energy Saving Initiative In the Public Transport Hub Building <i>Mohd. Isa bin Sulaiman, Abdul Hakim bin Mohamed</i>	45
5	Prediction of Freight Transportation In Lampung Province <i>Tas'an Junaedi</i>	51
6	Geological Control and Mitigation of Malino-Manipi Landslide, South Sulawesi Indonesia <i>Busthan, A.M.Imran, L. Samang, M. Ramli</i>	61
7	"Galodo" Padang 2012: Causes and Prevention <i>Abdul Hakam, Febrin A Ismail, Fauzan</i>	67
8	"COWAR" (Conservation of Water Resources): The Effort of Drought and Water Crisis Prevention In Brantas River Basin <i>Anggun Sugiarti, Donny Harisuseno</i>	73
9	The Impact of Remittance From International Migrants In Rural Area (Case Study: Bulupitu and Sepanjang Village, Malang Regency, Indonesia) <i>Gunawan Prayitno</i>	83

10	Renewable Energy from Waste Oil Palm Empty Fruit Bunches <i>Wetri Febrina, Tatang Hernas Soerawidjaja, Ronny Purwadi</i>	89
11	Lot Cripple Management Evaluation To Reduce The Number of Line Stop Using 8 Steps Approach and 7 Tools <i>Mulki Siregar, Fitri Ayu Lovita</i>	95
12	Implementation Comparison Analysis Method Junbiki with Kanban Reviewed by Method of Just In Time for Its Company Productivity <i>Raihan, Afriani Lestari</i>	105
13	Implementation of Agropolitan Approach in Malaysia: Preliminary Study at Pulau Banggi <i>Yusof Ahmad, Eusoff Yendo Afgani, Hamid Saad</i>	115
14	Design of Supply Chain Management (SCM) Palm Oil Production Flow In Web-Based <i>Henny Yulius, Abulwafa Muhammad, Susi</i>	121
15	Concrete Attribute of Culture on Kayik Public Place: When Simplicity Rules <i>Eusoff Yendo Afgani, Mahmud Bin Muhammad Jusan, Aliyu Salisu Barau</i>	131
16	Study the Impact of Knowledge Management Strategies on Firm Performance and Environmental Hostility as Moderator In Indonesian Manufacturing Firms <i>Alizar Hasan</i>	137
17	Analytical Method for Seismic Performance Evaluation of Infilled R/C Frames <i>Maidiawati, Yasushi Sanada</i>	149
18	Condition Index Based Maintenance and Rehabilitation Management <i>Yervi Hesna</i>	159
19	Used Container As A Temporary 'Public Toilet' <i>I Putu Widjaja Thomas Brunner, R. Roni Gursala, Roy Marko Tinamnunan, David Hayatullah</i>	171
20	Key Parameters In Lapping <i>Ikhwan Arief</i>	183
21	Artificial Rain Technology As An Alternative Increasing Sutami Reservoir Volume In Effort Tackling Drought Due To Global Climate Change <i>Annisa Akalily, Donny Harisuseno</i>	189
22	Fuzzy Multi-Objective Periodic Review Inventory Problem In A Dyadic Supply Chain System <i>Dicky Fatrias, Yoshiaki Shimizu</i>	197
23	Issues and Threats of Asset Management In Global Perspective <i>Bambang Istijono</i>	203
24	Feasibility of Tubular T-Joints As A Damage Controller for Roof Structures Under Loading <i>Eka Satria, Shiro Kato</i>	211
25	An Analysis of Heavy Equipment Supply Chain In Supporting Infrastructure Construction <i>Togar M. Simatupang, Achmad F. Hendarman</i>	219
26	Numerical Analysis Strategy for Solving the Large Scale and Complex Civil Engineering Structures Problems <i>Jafril Tanjung, Makoto Kawamura, Harpito</i>	227

27	Framework for Risk Allocation In PPP Infrastructure Development <i>Susy Fatena Rostiyanti, Moch. Husnulloah Pangeran</i>	235
28	Designing Maintenance Scorecard and Priority of KPI as Maintenance Performance Measurement Instrumen in PLTD (Diesel Power) <i>Taufik, Vidya Ayuningtyas</i>	247
29	Structural Analysis Program of Plane Frame with Visual Basic Language <i>Agus Rivani, Nirmalawati</i>	259
30	Computer Assisted Life Cycle Costing of Road Assets for Disaster Zone In Padang Indonesia <i>Insannul Kamil, Buang Alias, Hakim Mohammed, Nilda Tri Putri, Dio P. Hasian</i>	269
31	Performance Changes of Aerobic-Anoxic Membrane Bioreactor for Azo Dye Biodegradation Under Different Hydraulic Retention Time In Anoxic Tank <i>Puti Sri Komala, Agus Jatnika Effendi, IG. Wenten, Wisjnuprpto</i>	277
32	Life Cycle Costing of Road Assets In Disaster Zone (Case: Alai – By Pass Roads, Padang-Indonesia) <i>Insannul Kamil, Buang Alias, Hakim Mohammed, Nilda Tri Putri, Dio P. Hasian</i>	283
33	A Methodology to Evaluate Construction Project Using The Concept of Lean Construction <i>Alfadhlan, Sarah</i>	289
34	Flexural Crack Analysis In Reinforced Concrete Beams with Short Shear Span Length <i>Rendy Thamrin, Noor Azlina Abdul Hamid, Zalipah Jamellodin, Muhammad Aminsyah, Riza Aryanti</i>	293
35	A Study On the Application of Frequency Radio of Signal Tracker As A Base of Comparison of Channels of The Use of Operator In GSM Frequency of GSM 1800 <i>Neilcy. T. Mooniarsih, Fitri Imansyah, Youlanda</i>	301

FEASIBILITY OF TUBULAR T-JOINTS AS A DAMAGE CONTROLLER FOR ROOF STRUCTURES UNDER LOADING

Eka Satria¹ and Shiro Kato²

¹Dept. of Mechanical Engineering of Andalas University-Padang,

²Dept. of Civil and Architectural Engineering of Toyohashi University of Technology, Japan
email: ekasatria@ft.unand.ac.id

ABSTRACT

This paper is aimed to outline characteristics of tubular T-joints that were applied on a new type of two-way system for single layer lattice roof under influence of static and dynamics loads. The proposed roof is composed of two main arches, intersecting each other with welded T-joint struts to provide space for tensioning membranes. Two main characteristics of tubular T-joint were shown in this paper. The first is the nonlinear behaviour of the joints under repeated vertical loading and the second is under seismic horizontal loading. The interesting feature found after the first study is an ability of the system to make self-recovery after loading, since a large displacement occurred due to heavy vertical load almost vanish after unloading. While for the second study, at the strong earthquake motion, the yielding of the tubular T-joints can be used to absorb some amount of strain energy. Consequently, due to those characteristics, deformation of the arches as the main frames of the roof can be reduced and any heavy damages on the arches can be minimized.

KEY WORDS: Lattice Roof, Tubular T-Joints, Recovery System, Energy Absorber

1. INTRODUCTION

The two-way system for single layer lattice roofs is attractive to architects and engineers since such a system is beautiful in shape, light in weight and also systematic in construction. In the design steps, one of the important tasks is to secure sufficient safety against buckling. Recently, there are many accumulated researches of the stability of steel reticulated shells, however only a few of them have been developed in case of two-way system for single layer lattice roof (Yamashita, *et al.*, 2001; Kato *et al.*, 2005, 2006; Fujibayashi, *et al.*; 2006). Therefore, the buckling characteristics of these kinds of structures still need to be investigated.

This paper is actually an advanced study from several previous researches in investigating buckling behavior of a new type of two-way system for single layer lattice roof under vertical static loads such as snow loads (Kato *et al.*, 2008, and Satria, *et al.*, 2008a) and dynamic loads such as an earthquake (Satria, *et al.*, 2008b). The new model of roof is composed of

two main arches intersecting each other with T-joint struts in order to provide a space for tensioning membranes. This system adopts no diagonal bracing elements to avoid complications in construction therefore the global form become more simpler than any previous systems.

If in the previous papers, the design feasibility of the introduced roof system under static and dynamic loads have been detailly outlined, the present paper focuses on the effect of the tubular T-joints on the overall characteristics of the roof system under loadings. The characteristic is considered very beneficial in designing of roof structures especially in areas of high seismic level.

2. NUMERICAL MODEL OF ROOF STRUCTURES

2.1. Configuration of Roof Structure

As shown in Fig.1, the roof form is in two-way model and it is composed of a set of parallel arches, where each arch is connected through a

set of struts to the orthogonal arches. The surface of the roof is assumed like a curved shell, which is formed geometrically by rotating an arch of AOB with a radius R_z along the two same shaped arches of EAH and GBH . The radii of arches AOB and COD are R_x and R_z respectively. The total rise H is the sum of the rise, H_z , for the arch in the z direction, the length of the strut, h_i , and the diameter of the chord, D , or mathematically written as $H=H_z+h_i+D$. The length of each member along the arches AOB and COD might be an arbitrary. In Fig.1b, several parameters are also introduced. Firstly, h_i is assumed to be constant, 2500 mm. Secondly, l_0 is the length of arch member for each division has been assumed to be constant of 6000 mm at the centre of the roof in x and z direction. The surface has two half open angles, ϕ_x and ϕ_z , respectively in the x and z directions. In this paper ϕ_x and ϕ_z are assumed 30° and 25° . Then, each arch is divided into n members, n being assumed as 10 in this study, and the total arc lengths, L_x and L_z are set just to be 60000 mm. Therefore, both radii of arches can be calculated through equations, $R_x=n.l_0/2\phi_x=57296$ mm and $R_z=n.l_0/2\phi_z=68755$ mm, and the difference, $Z_0=R_z-(R_x-h_i)=13959$ mm using $h_i=2500$ mm.

2.2. T-Joint Connection

Tubular T-joint is modeled by connecting arch member, with diameter $D=318.5$ mm and thickness $T=8$ mm, to strut member, with diameter $d=216.3$ mm and thickness $t=8$ mm. Both members are made of steel using modulus

of elasticity (E) is 205×10^3 N/mm² and yield stress (σ_y) is 235 N/mm². The rigidities and strengths of the joints are separately calculated using nonlinear finite element technique, as fully described later in Chapter 3.

2.3. Boundary Condition and Distribution of Load

The roof is assumed to be initially subjected to a vertical dead load P_0 , given at the upper and lower node of the strut members. Arches at the boundaries where all strut nodes have to be pin-supported (restrained in the x , y and z directions) at their upper and lower joints are exempted.

2.4. Geometrical Imperfections

Since effects of geometrical imperfections are large in case of single layer lattice roofs, the present study assumes a deformation distribution, $W_{imp}(x,z)$, for geometrical imperfections, based on the first buckling mode obtained by using FEM eigenvalue analysis for each model of lattice roof. Then normalization of deformation is done, so that the peak value of $W_1(x,z)$ is set as 1.0 for the maximum deflection. $W_{imp}(x,z)=w_{i0} \cdot W_1(x,z)$; $w_{i0}=\pm \min(L_x, L_z/1000)$.. (1)

In this paper, the maximum amplitude of imperfection, w_{i0} , for the presented roof is assumed to be uniform, around 60 mm in the negative y -direction. This value is resulted from Eq. (1) with L_x is equal to L_z about 60000 mm.

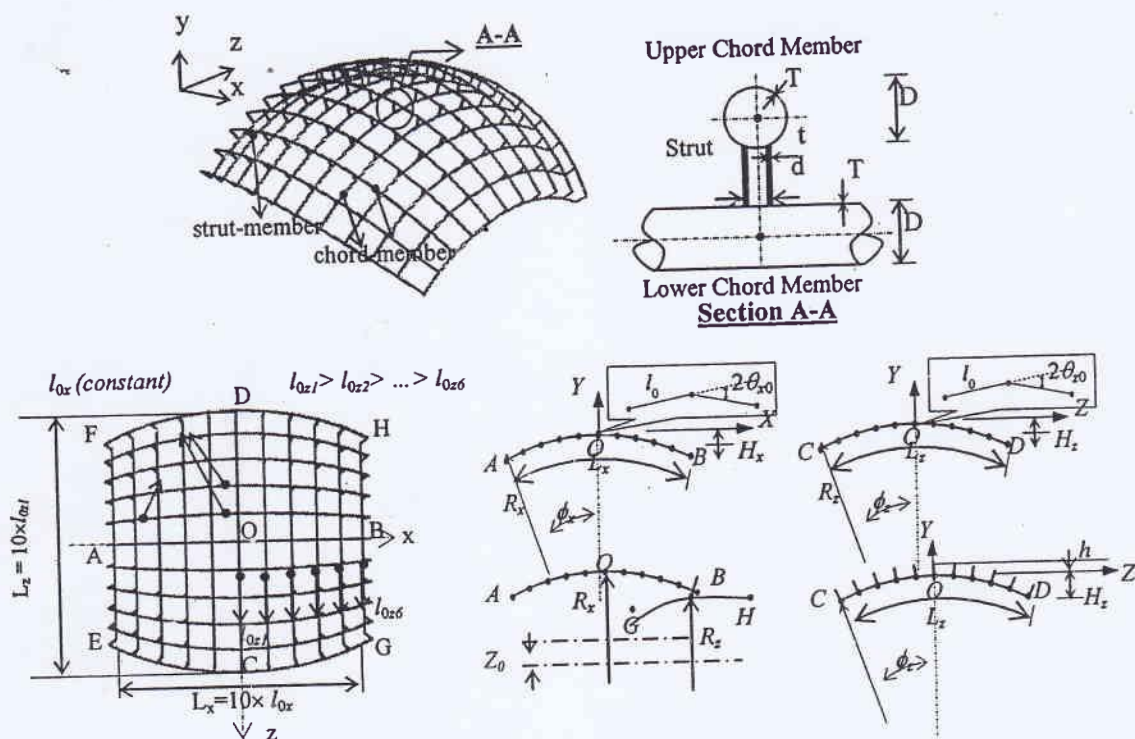


Figure.1(a) Two-Way Single Layer Lattice Roof with Nodal Eccentricity (upper)
(b) Configuration of Roof: Geometrical Model (lower-left) and Geometrical Parameters (lower-right)

3. NUMERICAL MODEL OF TUBULAR T-JOINTS

By following the procedure for modeling tubular joint developed by Cao et. al. (1997), the tubular T-joint model is successfully modeled, as seen in Fig.2. Both tubular members, brace and chord, are connected each other using welding part, which is modeled according to welding standard which is given by AIJ (Architectural Institute of Japan, 1993). However, in this paper, the welding part is not installed by a crack model. Therefore, any failures due to crack propagation which are usually occurred in the welding part of tubular joint are not considered.


3.1 Geometrical and Material Properties

The tubular members, with geometrical properties mentioned in subchapter 2.2 are made of steel using modulus of elasticity (E) is $205 \times 10^3 \text{ N/mm}^2$ and yield stress (σ_y) is 235 N/mm^2 . The stress-strain relationship is approached by bi-linear model with Von-Misses yield criterion, whereas plasticity condition is

represented by associated flow rule and isotropic hardening rule with hardening parameter (H) of $E/1000$.

3.2 Rigidities and Strength of T-Joint

Rigidities and strengths of the tubular T-joint are determined by numerical calculation based on nonlinear FEM under three types of basic loading; in-plane bending (*IPB*), out-of-plane bending (*OPB*) and axial loading (*AXL*). Table 1 shows the results of calculation for all types of loading. However for axial loading case, the result is not shown in the table because of very small value of deformation given by this case.

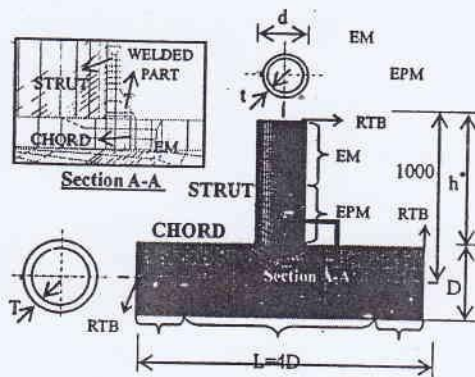

Note:
 D : Diameter of the chord (mm)
 T : Thickness of the chord (mm)
 L : Length of the chord (mm)
 d : Diameter of the strut (mm)
 t : Thickness of the strut (mm)
 h : Length of the strut (mm)
 RTB : Rigid Thin Body
 EM : Elastic Material
 EPM : Elasto-Plastic Material

Figure.2 Numerical Model of T-Joint

Table.1. Rigidities and Strength of T-Joints under IPB and OPB.

K_{IPB} (kN.m/10°rad)	K_{OPB} (kN.m/10°rad)	$M_{y,IPB}$ (kN.m)	$M_{u,IPB}$ (kN.m)	$M_{y,OPB}$ (kN.m)	$M_{u,OPB}$ (kN.m)
33.71	10.01	323.0	337.0	221.0	247.0

Later, the rigidities and strengths given by Table.1 are used in all T-joints of the roof structure which is geometrically shown in Chapter 2.

3.3 Validity of Numerical Results

To check the validity of the numerical calculation (denoted by full lines), Fig. 3 shows its comparison to experimental results (denoted by dotted lines) given by some previous works. Akiyama's experiments are used to validate the results of in-plane bending and out-of-plane bending cases, while Makino's work (Akiyama, 1988) is used to validate the axial loading case. In general, all results show a good agreement between two approaches.


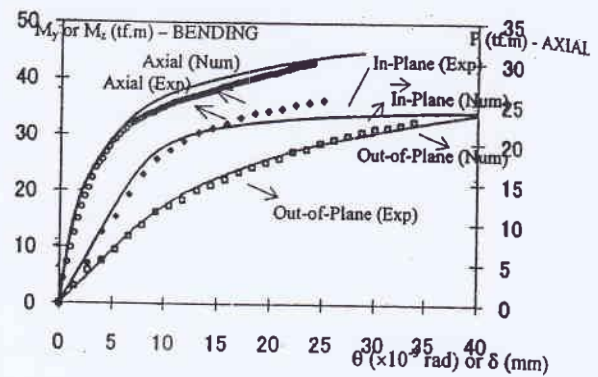


Figure.3 Validation of Nonlinear FEM of T-Joint with Experimental Results

4. DESIGN FEASIBILITY OF THE ROOF

Fig.4 shows the design feasibility the roof under elastic and elasto-plastic analysis. Based on the criteria specified in Design Standard for Steel Structures published by Architectural Institute of Japan 2002, the maximum displacement under the critical load from elastic analysis should be less than or equal to $\delta_{max} = L_z/300 = 60000/300 = 200 \text{ mm}$.

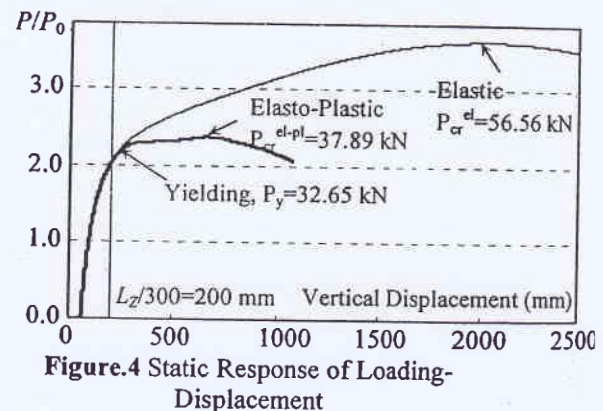

It means the load that gives $\delta_{max} = 20 \text{ cm}$ can be notified as the critical load. This is found as $P_{cr}/P_0 = 2.06$ leading $P_{cr} = 31.1 \text{ kN/node}$ or in term of load intensity, $p_{cr,design} = 2 \times 31.1 \text{ kN}/(6 \times 6 \text{ m}^2) = 1.73 \text{ kN/m}^2$.

According to its geometry, this roof practically can be used to support the dead load around 0.86 kN/m^2 and additional vertical load like a snow load up to 0.87 kN/m^2 . This value is corresponding to regions under moderate snow loads in Japan.

5. CHARACTERISTIC OF T-JOINT UNDER A STATIC REPEATED LOADING

The repeated uniform snow loads (1 kN/m^2 per each layer of roof) are represented by giving five low cycles (loading-unloading steps) to the present roofs. The first cycle is given until the deformation up to $\delta_1=10\text{cm}$, the second cycle is up to $\delta_2=20\text{cm}$, followed by the third cycle is up to $\delta_3=30\text{cm}$, then the fourth cycle is up to $\delta_4=40\text{cm}$ and the last is up to $\delta_5=50\text{cm}$. All unloading steps are given until $P=0 \text{ kN}$. Two reference points are taken; first is at the critical joint (Fig.5a) and second is at the maximum vertical deflection point (Fig.5b).

The remarkable feature found after this study is its self recovery system for displacements since large displacements occurred due to heavy snow loads almost vanish after unloading [3], even until $\delta_5=50\text{cm}$, the residual plastic deformation at the critical joint is smaller than 10cm . The reason of this recovery is the fact that most of the deformations attribute to elastic strains in the structures (see Fig.3a). And once an overload is given, some parts at the ends of strut members are deformed plastically without any damage to main arches.

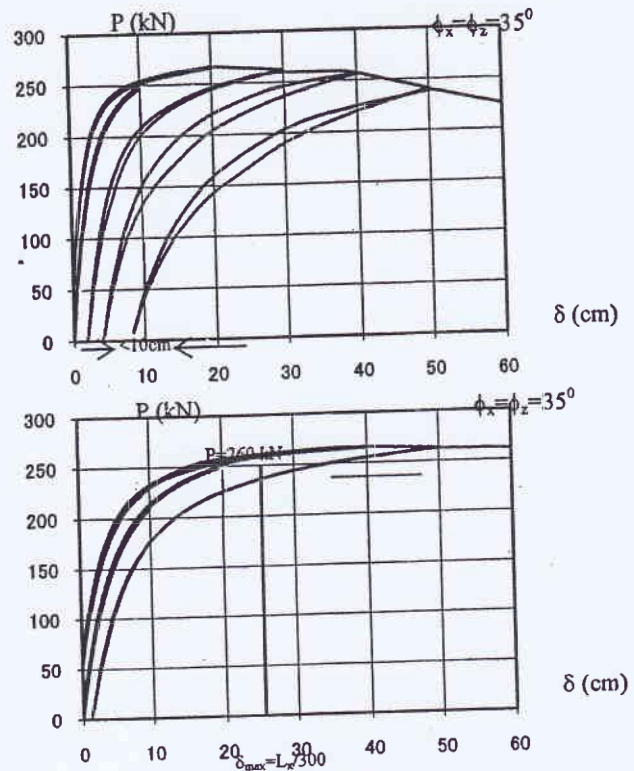


Figure.5 Static Responses of Roof Structure under Repeated Loading: (a) at the critical joint (top) (b) at the maximum vertical deflection joint (below)

6. CHARACTERISTIC OF T-JOINT UNDER A DYNAMIC LOADING

In term of dynamic loads such as earthquake motions, the plasticization of joint system can be considered is able to absorb energy due to the strong disturbances. The description below is used to justify this prediction under earthquake motion.

6.1 Earthquake Motion

El-CentroNS(1940) with 50 seconds duration and peak acceleration in range of 100cm/s^2 to 1250cm/s^2 are adopted for the horizontal seismic ground motion as presented in Fig. 4.

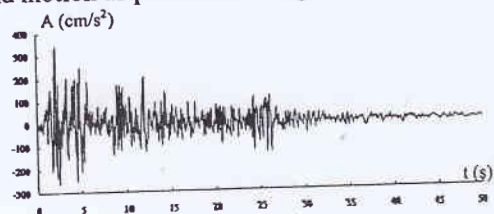


Figure. 4 Time history of El-CentroNS

6.2 Description of Dynamic Calculation

Average acceleration method of Newmark- β scheme with $\beta=1/4$ is used for numerical integration with time interval for calculation Δt is 0.005 sec. The Rayleigh damping is assumed to the roof with 2% damping constant at periods of $T_1=1.5$ sec and $T_2=0.1$ sec.

6.3 Results in Term of Absorbed Energy

Energy absorbing capability is determined by examining the roof under earthquake loadings with maximum acceleration A_{max} is varied between 100 to 1250 cm/s^2 . Several types of energy then are evaluated. The consumed energy is summation between kinematics, damping and strain energy, as shown in Fig.5. The kinematic energy is almost zero after the earthquake.

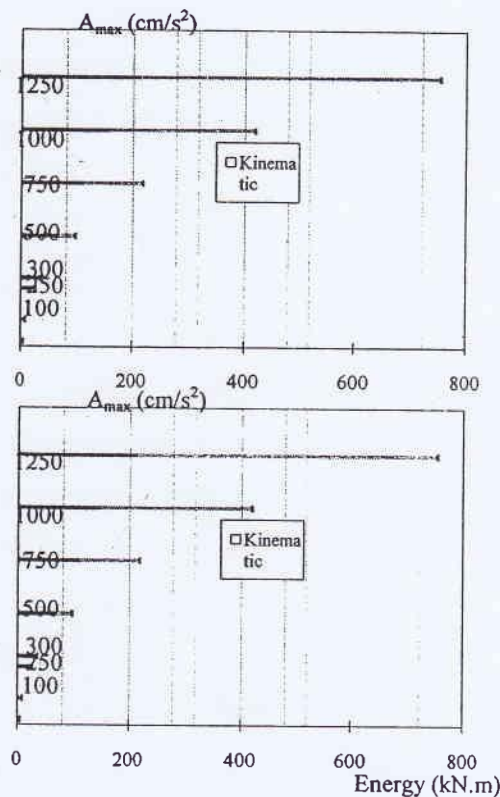


Figure.5 Absorbed Energy: (a) when earthquake is loading in x-direction, and (b) when earthquake is loading in z-direction

Table 2. Percentage of strain energy when earthquake is loading in x-direction (left).

A_{max} (cm/s^2)	% Strain Energy (Loading in X-Direction)	
	Arch	Strut
100	89.0	11.0
250	89.0	11.0
300	85.6	14.4
500	14.6	85.4
750	3.7	96.3
1000	1.5	98.5
1250	0.8	99.2

Table 3. Percentage of strain energy when earthquake is loading in z-direction (right).

A_{max} (cm/s^2)	% Strain Energy (Loading in Z-Direction)	
	Arch	Strut
100	89.0	11.0
250	89.0	11.0
300	84.4	15.6
500	10.9	89.1
750	2.1	97.9
1000	0.9	99.1
1250	0.5	99.5

Table 2 and 3 show the exact values and also the percentage of strain energy absorbed by the arches and struts during the earthquake given in the x and z directions respectively. As a general remark, it can be noticed that the struts have mainly absorbed the strain energy when the structure is subjected to the earthquake with maximum input acceleration $A_{max} \geq 500$ cm/s^2 , while for ground motion $A_{max} \leq 300$ cm/s^2 , most of the strain energy is absorbed by the arches. This phenomenon may be explained with regards to the structures performance at earthquake loading as follows. During a strong earthquake shaking, the plasticity will firstly occur at the strut joints by yielding. However the strain energy would be absorbed very well by the T-joints when yielding takes a place, reducing the possibility of some unexpected damages to the main arches. At the weak earthquake, strain energy is mainly absorbed by the main arches; but as the deformations are quite small in this case, the main arches would be in safe condition.

7. CONCLUSION

The present paper has investigated the the effect of the tubular T-joints on the overall characteristics of the roof system under

loadings. The presumptions assumed in the study are that (1) the plan for the roofs is rectangular with a size of $L_x \times L_z$, where L_x and L_z are 60 m, (2) the rise is relatively shallow with 30° and 25° for the half open angle respectively in the x and z directions, (3) the length of strut member placed between orthogonal arches is 250 cm, (4) the boundaries of roof at all peripheries are pin supported, (5) the roof has geometrical imperfections of which peak amplitude is $\pm L_x/1000$, and (6) the dead load is uniformly distributed.

Several important conclusions can be drawn as follows.

1. The roof is feasible to be applied in construction of long span structures.
2. The benefit of using the T-joint struts against the repeated snow loads is that the residual plastic deformation (δ_0) due to heavy loading is small compared to the maximum displacement. The reason of this recovery is the fact that most of the deformations attribute to elastic strains in the structures, and once an overload is given, some parts at the ends of strut members are deformed plastically without any damage to main arches.
3. The benefit of using the T-joint struts against earthquake is that the yielding of strut joints has a good capability to absorb some of seismic energy against severe earthquakes; therefore any plastic residual deformations that occurred after the dynamic loads are much smaller than maximum deformation during the earthquake. The results are very beneficial to reduce any heavy damages to the main arches. Moreover, it implies that the proposed roof has a kind of damage-control characteristic against severe earthquake motion.

ACKNOWLEDGEMENTS

The authors gratefully acknowledge for the partial supports of Research Mandiri No. 002/PL/SPK/PNP/FT-Unand/2012 given by Engineering Faculty of Andalas University in 2012.

REFERENCES

Kato, S., Fujimoto, M., Ogawa, T. (2005), "Buckling Load of Steel Single-Layer Reticulated Domes of Circular Plan", J. of The International Association for Shell and Spatial Structures, Vol. 64, pp. 41-63.

Yamashita, T., Kato, S. (2001); "Elastic Buckling Characteristics of Two-Way Grid Shells of Single Layer and Its Application in Design to Evaluate the Nonlinear Behavior and Ultimate Strength", Journal of Constructional Steel Research; Vol. 57(12), pp. 1289-1308.

Fujibayashi, A., Kato, S., Yamashita, T., Nakazawa, S. (2006); "Evaluation for Buckling Loads of Two-Way Elliptic Paraboloidal Single Layer Lattice Dome", Annual Meeting of Architectural Institute of Japan, Vol. B-1, pp. 747-748.

Kato, S., Yamashita, T., Nakazawa, S., Kim, Y.B., Fujibayashi, A. (2006); "Analysis based Evaluation for Buckling Loads of Two-Way Elliptic Paraboloidal Single Layer Lattice Domes", Journal of Constructional Steel Research; Vol. 62, pp. 1219-1227.

Kato, S., Satria, E., Kim, Y.B., Nakazawa, S. (2008), "Analysis of Nonlinear Behavior and Feasibility for A New Type of Two-Way Single Layer Lattice Dome with Nodal Eccentricity using T-Joint Struts", Journal of Steel Construction Engineering (JSSC), June, Vol. 15(58), pp. 21-36.

Satria, E., Kato, S., Nakazawa, S., Kakuda, D. (2008a), "Buckling Behavior of Two-Way Single Layer Lattice Dome with Nodal Eccentricity", Journal of Structural Engineering, Architectural Institute of Japan (AIJ), March, Vol. 54B, pp. 679-692.

Satria, E., Kato, S., Nakazawa, S., Kakuda, D. (2008b), "Dynamics Analysis of Single Layer Lattice Dome with Nodal Eccentricity", Steel and Composite Structures, December, Vol. 54B, pp. 679-692.

Cao, et. al (1997), "FE Mesh generation for Circular Joints with and without cracks", Proc. of Int. Offshore and Polar Eng. Conf.

Architectural Institute of Japan (1993), "Japanese Architectural Standard Specification JASS 6 Steel Work", Maruzen, Tokyo (in Japanese).

Architectural Institute of Japan (2002), *"Design Standard for Steel Structures"*, Maruzen, Tokyo (in Japanese).

Akiyama. S (1988), *"Study on Space Frame by 3-D Tubular Rahmen-Part:2 Test on Tubular T-Joint under Bending"*, AIJ AnnualMeeting:S63.10, pp1167-1170



CERTIFICATE

This is to Certify That

EKA SATRIA

as

PRESENTER

Has Attended the
International Conference on Construction Industry,
Facilities and Asset Management
(ICCIFAM 2012)

Organized by
Faculty of Engineering Andalas University with
West Sumatera Province of Construction Services
Development Board (LPJK-P Sumbar)

Rector of Andalas University
Padang, Indonesia

Construction Services Development Board
West Sumatera Province, Indonesia

Dr. H. Werry Darta Taifur, S.E., M.A.

Ir. Muhammad Dien



ICCIFAM_2012

by Eka Satria

Submission date: 29-Jun-2018 05:57 PM (UTC+0800)

Submission ID: 979341924

File name: Eka_Satria_-_ICCIFAM_2012.doc (2.8M)

Word count: 2856

Character count: 16296

FEASIBILITY OF TUBULAR T-JOINTS AS A DAMAGE CONTROLLER FOR ROOF STRUCTURES UNDER LOADING

Eka Satria* and Shiro Kato**

*Dept. of Mechanical Engineering of Andalas University-Padang, email: ekasatria@ft.unand.ac.id

**Dept. of Civil and Architectural Engineering of Toyohashi University of Technology, Japan

ABSTRACT

This paper is aimed to outline characteristics of tubular T-joints that were applied on a new type of two-way system for single layer lattice roof under influence of static and dynamics loads. The proposed roof is composed of two main arches, intersecting each other with welded T-joint struts to provide space for tensioning membranes. Two main characteristics of tubular T-joint were shown in this paper. The first is the nonlinear behaviour of the joints under repeated vertical loading and the second is under seismic horizontal loading. The interesting feature found after the first study is an ability of the system to make self-recovery after loading, since a large displacement occurred due to heavy vertical load almost vanish after unloading. While for the second study, at the strong earthquake motion, the yielding of the tubular T-joints can be used to absorb some amount of strain energy. Consequently, due to those characteristics, deformation of the arches as the main frames of the roof can be reduced and any heavy damages on the arches can be minimized.

KEY WORDS: Lattice Roof, Tubular T-Joints, Recovery System, Energy Absorber

1. INTRODUCTION

The two-way system for single layer lattice roofs is attractive to architects and engineers since such a system is beautiful in shape, light in weight and also systematic in construction. In the design steps, one of the important tasks is to secure sufficient safety against buckling. Recently, there are many accumulated researches of the stability of steel reticulated shells, however only a few of them have been developed in case of two-way system for single layer lattice roof (Yamashita, *et al.*, 2001; Kato *et al.*, 2005, 2006; Fujibayashi, *et al.*, 2006). Therefore, the buckling characteristics of these kinds of structures still need to be investigated.

This paper is actually an advanced study from several previous researches in investigating buckling behavior of a new type of two-way system for single layer lattice roof under vertical static loads such as snow loads (Kato *et al.*, 2008, and Satria, *et al.*, 2008a) and dynamic loads such as an earthquake (Satria, *et al.*, 2008b). The new model of roof is composed of two main arches intersecting each other with T-joint struts in order to provide a space for tensioning membranes. This system adopts no diagonal bracing elements to avoid complications in construction therefore the global form become more simpler than any previous systems.

If in the previous papers, the design feasibility of the introduced roof system under static and dynamic loads have been detailly outlined, the present paper focuses on the effect of the tubular T-joints on the overall characteristics of the roof system under loadings. The characteristic is considered very beneficial in designing of roof structures especially in areas of high seismic level.

2. NUMERICAL MODEL OF ROOF STRUCTURES

2.1. Configuration of Roof Structure

As shown in Fig.1, the roof form is in two-way model and it is composed of a set of parallel arches, where each arch is connected through a set of struts to the orthogonal arches. The surface of the roof is assumed like a curved shell, which is formed geometrically by rotating an arch of AOB with a radius R_1 along the two same shaped arches of EAF and GBH. The radii of arches AOB and COD are R_1 and R_2 respectively. The total rise H is the sum of the rise, H_z , for the arch in the z direction, the length of the strut, h_1 , and the diameter of the chord, D , or mathematically written as $H = H_z + h_1 + D$. The length of each member along the arches AOB and COD might be an arbitrary. In Fig.1b, several parameters are also introduced. Firstly, h_1 is assumed to be constant, 2500 mm. Secondly, l_0 is the length of arch member for each division has been assumed to be constant of 6000 mm at the centre of the roof in x and z direction. The surface has two half open angles, ϕ_1 and ϕ_2 , respectively in the x and z directions. In this paper ϕ_1 and ϕ_2 are assumed 30° and 25° . Then, each arch is divided into n members, n being assumed as 10 in this study, and the total arc lengths, L_1 and L_2 are set just to be 60000 mm. Therefore, both radii of arches can be calculated through equations, $R_1 = n \cdot l_0 / 2\phi_1 = 57296$ mm and $R_2 = n \cdot l_0 / 2\phi_2 = 68755$ mm, and the difference, $Z_0 = R_2 - (R_1 - h_1) = 13959$ mm using $h_1 = 2500$ mm.

2.2. T-Joint Connection

Tubular T-joint is modeled by connecting arch member, with diameter $D = 318.5$ mm and thickness $T = 8$ mm, to strut member, with diameter $d = 216.3$ mm and thickness $t = 8$ mm. Both members are made of steel

using modulus of elasticity (E) is $205 \times 10^3 \text{ N/mm}^2$ and yield stress (σ_y) is 235 N/mm^2 . The rigidities and strengths of the joints are separately calculated using nonlinear finite element technique, as fully described later in Chapter 3.

2.3. Boundary Condition and Distribution of Load

The roof is assumed to be initially subjected to a vertical dead load P_0 , given at the upper and lower node of the strut members. Arches at the boundaries where all strut nodes have to be pin-supported (restrained in the x , y and z directions) at their upper and lower joints are exempted.

2.4. Geometrical Imperfections

Since effects of geometrical imperfections are large in case of single layer lattice roofs, the present study

assumes a deformation distribution, $W_{imp}(x, z)$, for geometrical imperfections, based on the first buckling mode obtained by using FEM eigenvalue analysis for each model of lattice roof. Then normalization of deformation is done, so that the peak value of $W_1(x, z)$ is set as 1.0 for the maximum deflection.

$$W_{imp}(x, z) = w_{i0} \cdot W_1(x, z); \quad w_{i0} = \pm \min(L_x, L_z / 1000) \quad \dots (1)$$

In this paper, the maximum amplitude of imperfection, w_{i0} , for the presented roof is assumed to be uniform, around 60 mm in the negative y -direction. This value is resulted from Eq. (1) with L_x is equal to L_z about 60000 mm .

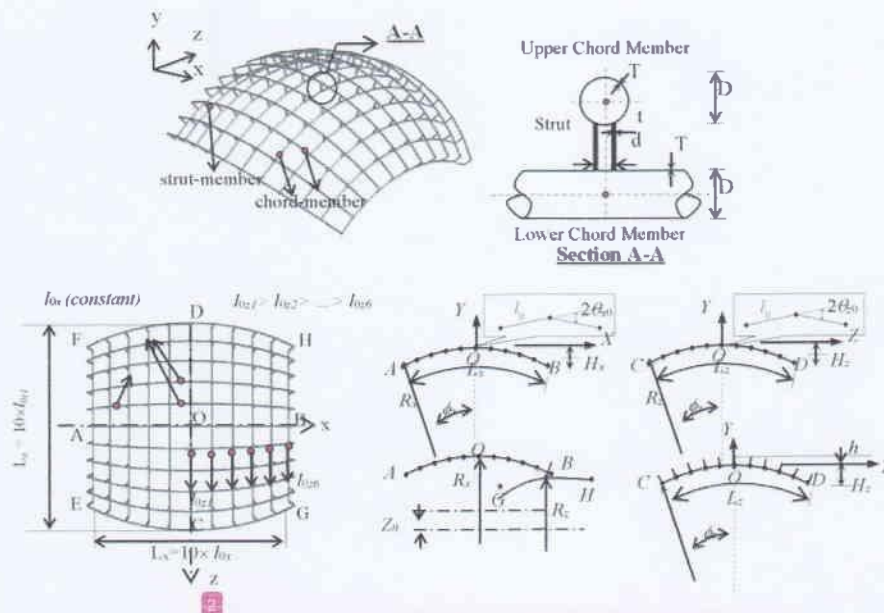


Figure 1(a) Two-Way Single Layer Lattice Roof with Nodal Eccentricity (upper)
(b) Configuration of Roof: Geometrical Model (lower-left) and Geometrical Parameters (lower-right)

3. NUMERICAL MODEL OF TUBULAR T-JOINTS

By following the procedure for modeling tubular joint developed by Cao et. al. (1997), the tubular T-joint model is successfully modeled, as seen in Fig.2. Both tubular members, brace and chord, are connected each other using welding part, which is modeled according to welding standard which is given by AIJ (Architectural Institute of Japan, 1993). However, in this paper, the welding part is not installed by a crack model. Therefore, any failures due to crack propagation which are usually occurred in the welding part of tubular joint are not considered.

3.1 Geometrical and Material Properties

The tubular members, with geometrical properties mentioned in subchapter 2.2 are made of steel using modulus of elasticity (E) is $205 \times 10^3 \text{ N/mm}^2$ and yield stress (σ_y) is 235 N/mm^2 . The stress-strain relationship is approached by bi-linear model with Von-Misses yield criterion, whereas plasticity condition is represented by associated flow rule and isotropic hardening rule with hardening parameter (H) of $E/1000$.

3.2 Rigidities and Strength of T-Joint

Rigidities and strengths of the tubular T-joint are determined by numerical calculation based on nonlinear FEM under three types of basic loading: in-plane bending (IPB), out-of-plane bending (OPB) and

axial loading (AXL). Table 1 shows the results of calculation for all types of loading. However for axial loading case, the result is not shown in the table because of very small value of deformation given by this case.

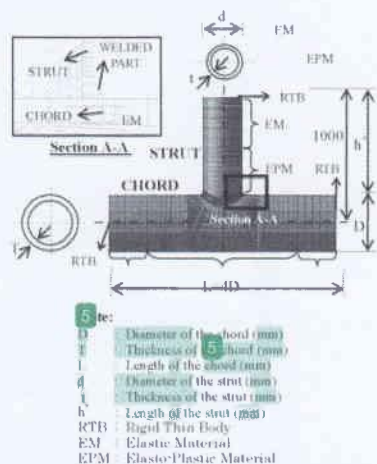


Figure 2 Numerical Model of T-Joint

Table 1. Rigidities and Strength of T-Joints under IPB and OPB.

K_{IPB} (kN/m/10 ⁻³ rad)	K_{OPB} (kN/m/10 ⁻³ rad)	$M_{L,IPB}$ (kN/m)	$M_{L,OPB}$ (kN/m)	$M_{Y,OPB}$ (kN/m)	$M_{U,OPB}$ (kN/m)
33.71	10.01	323.0	337.0	221.0	247.0

Later, the rigidities and strengths given by Table 1 are used in all T-joints of the roof structure which is geometrically shown in Chapter 2.

3.3 Validity of Numerical Results

To check the validity of the numerical calculation (denoted by full lines), Fig. 3 shows its comparison to experimental results (denoted by dotted lines) given by some previous works. Akiyama's experiments are used to validate the results of in-plane bending and out-of-plane bending cases, while Makino's work (Akiyama, 1988) is used to validate the axial loading case. In general, all results show a good agreement between two approaches.

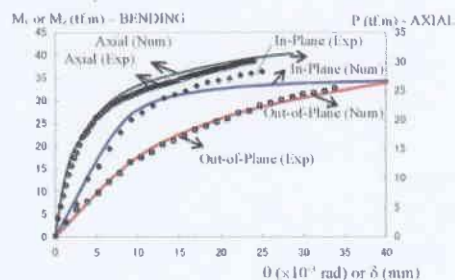


Figure 3 Validation of Nonlinear FEM of T-Joint with Experimental Results

4. DESIGN FEASIBILITY OF THE ROOF

Fig. 4 shows the design feasibility the roof under elastic and elasto-plastic analysis. Based on the criteria specified in Design Standard for Steel Structures published by Architectural Institute of Japan 2002, the maximum displacement under the critical load from elastic analysis should be less than or equal to $\delta_{max} = L_Z/300 = 60000/300 = 200$ mm.

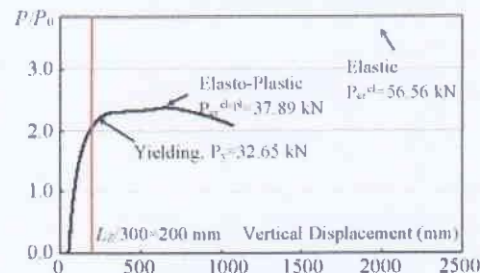


Figure 4 Static Response of Loading-Displacement

It means the load that gives $\delta_{max} = 20$ cm can be notified as the critical load. This is found as $P_{cr}/P_u = 2.06$ leading $P_{cr} = 31.1$ kN/node or in term of load intensity, $p_{cr, design} = 2 \times 31.1$ kN/(6 × 6 m²) = 1.73 kN/m².

According to its geometry, this roof practically can be used to support the dead load around 0.86 kN/m² and additional vertical load like a snow load up to 0.87 kN/m². This value is corresponding to regions under moderate snow loads in Japan.

5. CHARACTERISTIC OF T-JOINT UNDER A STATIC REPEATED LOADING

The repeated uniform snow loads (1 kN/m² per each layer of roof) are represented by giving five low cycles (loading-unloading steps) to the present roofs. The first cycle is given until the deformation up to $\delta_1 = 10$ cm, the second cycle is up to $\delta_2 = 20$ cm, followed by the third cycle is up to $\delta_3 = 30$ cm, then the fourth cycle is up to $\delta_4 = 40$ cm and the last is up to $\delta_5 = 50$ cm. All unloading steps are given until $P = 0$ kN. Two reference points are taken; first is at the critical joint (Fig. 5a) and second is at the maximum vertical deflection point (Fig. 5b).

The remarkable feature found after this study is its self recovery system for displacements since large displacements occurred due to heavy snow loads almost vanish after unloading [3], even until $\delta_5 = 50$ cm, the residual plastic deformation at the critical joint is smaller than 10 cm. The reason of this recovery is the fact that most of the deformations attribute to elastic strains in the structures (see Fig. 3a). And once an overload is given, some parts at the ends of strut members are deformed plastically without any damage to main arches.

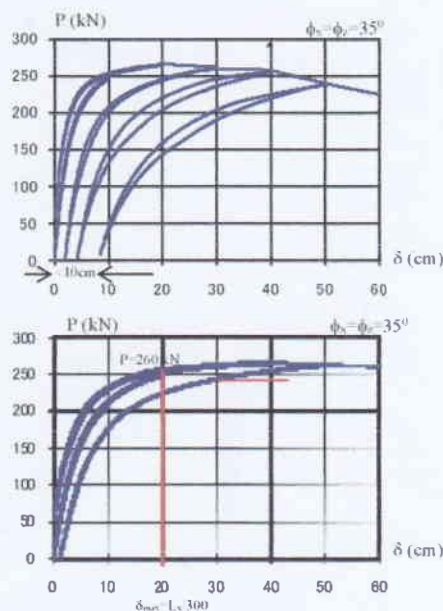


Figure.5 Static Responses of Roof Structure under Repeated Loading: (a) at the critical joint (top) (b) at the maximum vertical deflection joint (below)

6. CHARACTERISTIC OF T-JOINT UNDER A DYNAMIC LOADING

In term of dynamic loads such as earthquake motions, the plasticization of joint system can be considered is able to absorb energy due to the strong disturbances. The description below is used to justify this prediction under earthquake motion.

6.1 Earthquake Motion

El-CentroNS(1940) with 50 seconds duration and peak acceleration in range of 100cm/s^2 to 1250cm/s^2 are adopted for the horizontal seismic ground motion as presented in Fig. 4.

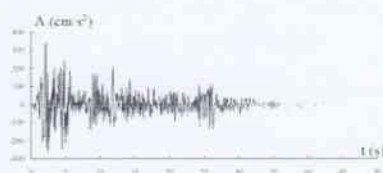


Figure. 4 Time history of El-CentroNS

6.2 Description of Dynamic Calculation

Average acceleration method of Newmark- β scheme with $\beta=1/4$ is used for numerical integration with time interval for calculation Δt is 0.005 sec. The Rayleigh damping is assumed to the roof with 2% damping constant at periods of $T_1=1.5$ sec and $T_2=0.1$ sec.

6.3 Results in Term of Absorbed Energy

Energy absorbing capability is determined by examining the roof under earthquake loadings with maximum acceleration A_{max} is varied between 100 to 1250cm/s^2 . Several types of energy then are evaluated. The consumed energy is summation between kinematics, damping and strain energy, as shown in Fig.5. The kinematic energy is almost zero after the earthquake.

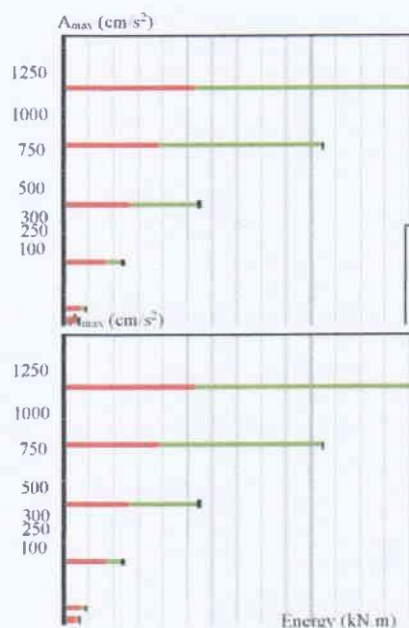


Figure.5 Absorbed Energy: (a) when earthquake is loading in x-direction, and (b) when earthquake is loading in z-direction

Table 2. Percentage of strain energy when earthquake is loading in x-direction (left).

A_{max} (cm/s^2)	% Strain Energy (Loading in X-Direction)	
	Arch	Strut
100	89.0	11.0
250	89.0	11.0
300	85.6	14.4
500	14.6	85.4
750	3.7	96.3
1000	1.5	98.5
1250	0.8	99.2

Table 3. Percentage of strain energy when earthquake is loading in z-direction (right).

A_{max} (cm/s^2)	% Strain Energy (Loading in Z-Direction)	
	Arch	Strut
100	89.0	11.0
250	89.0	11.0
300	84.4	15.6
500	10.9	89.1

750	2.1	97.9
1000	0.9	99.1
1250	0.5	99.5

Table 2 and 3 show the exact values and also the percentage of strain energy absorbed by the arches and struts during the earthquake given in the x and z directions respectively. As a general remark, it can be noticed that the struts have mainly absorbed the strain energy when the structure is subjected to the earthquake with maximum input acceleration $A_{max} \geq 500 \text{ cm/s}^2$, while for ground motion $A_{max} \leq 300 \text{ cm/s}^2$, most of the strain energy is absorbed by the arches. This phenomenon may be explained with regards to the structures performance at earthquake loading as follows. During a strong earthquake shaking, the plasticity will firstly occur at the strut joints by yielding. However the strain energy would be absorbed very well by the T-joints when yielding takes a place, reducing the possibility of some unexpected damages to the main arches. At the weak earthquake, strain energy is mainly absorbed by the main arches; but as the deformations are quite small in this case, the main arches would be in safe condition.

7. CONCLUSION

The present paper has investigated the effect of the tubular T-joints on the overall characteristic of the roof system under loadings. The presumptions assumed in the study are that (1) the plan for the roofs is rectangular with a size of L_x , L_z , where L_x and L_z are 60 m, (2) the rise is relatively shallow with 30° and 25° for the half open angle respectively in the x and z directions, (3) the length of strut member placed between orthogonal arches is 250 cm, (4) the boundaries of roof at all peripheries are pin supported, (5) the roof has geometrical imperfections of which peak amplitude is $\pm L_z/1000$, and (6) the dead load is uniformly distributed.

Several important conclusions can be drawn as follows:

- The roof is feasible to be applied in construction of long span structures.
- The benefit of using the T-joint struts against the repeated snow loads is that the residual plastic deformation (δ_0) due to heavy loading is small compared to the maximum displacement. The reason of this recovery is the fact that most of the deformations attribute to elastic strains in the structures, and once an overload is given, some parts at the ends of strut members are deformed plastically without any damage to main arches.
- The benefit of using the T-joint struts against earthquake is that the yielding of strut joints has a good capability to absorb some of seismic energy against severe earthquakes; therefore any plastic residual deformations that occurred after the dynamic loads are much smaller than maximum deformation during the earthquake. The results are very beneficial to reduce any heavy damages to the

main arches. Moreover, it implies that the proposed roof has a kind of damage-control characteristic against severe earthquake motion.

ACKNOWLEDGEMENTS

The authors gratefully acknowledge for the partial supports of Research Mandiri No. 002/PL/SPK/PNP/FT-Unand/2012 given by Engineering Faculty of Andalas University in 2012.

REFERENCES

- Kato, S., Fujimoto, M., Ogawa, T. (2005). "Buckling Load of Steel Single-Layer Reticulated Domes of Circular Plan", J. of The International Association for Shell and Spatial Structures, Vol. 64, pp. 41-63.
- Yamashita, T., Kato, S. (2001). "Elastic Buckling Characteristics of Two-Way Grid Shells of Single Layer and Its Application in Design to Evaluate the Nonlinear Behavior and Ultimate Strength", Journal of Constructional Steel Research, Vol. 57(12), pp. 1289-1308.
- Fujibayashi, A., Kato, S., Yamashita, T., Nakazawa, S. (2006). "Evaluation for Buckling Loads of Two-Way Elliptic Paraboloidal Single Layer Lattice Dome", Annual Meeting of Architectural Institute of Japan, Vol. B-1, pp. 747-748.
- Kato, S., Yamashita, T., Nakazawa, S., Kim, Y.B., Fujibayashi, A. (2006). "Analysis based Evaluation for Buckling Loads of Two-Way Elliptic Paraboloidal Single Layer Lattice Domes", Journal of Constructional Steel Research, Vol. 62, pp. 1219-1227.
- Kato, S., Satria, E., Kim, Y.B., Nakazawa, S. (2008). "Analysis of Nonlinear Behavior and Feasibility for A New Type of Two-Way Single Layer Lattice Dome with Nodal Eccentricity using T-Joint Struts", Journal of Steel Construction Engineering (JSSC), June, Vol. 15(58), pp. 21-36.
- Satria, E., Kato, S., Nakazawa, S., Kakuda, D. (2008a). "Buckling Behavior of Two-Way Single Layer Lattice Dome with Nodal Eccentricity", Journal of Structural Engineering, Architectural Institute of Japan (AIJ), March, Vol. 54B, pp. 679-692.
- Satria, E., Kato, S., Nakazawa, S., Kakuda, D. (2008b). "Dynamics Analysis of Single Layer Lattice Dome with Nodal Eccentricity", Steel and Composite Structures, December, Vol. 54B, pp. 679-692.
- Cao, et. al (1997). "FE Mesh generation for Circular Joints with and without cracks", Proc. of Int. Offshore and Polar Eng. Conf.
- Architectural Institute of Japan (1993). "Japanese Architectural Standard Specification JASS 6 Steel Work", Maruzen, Tokyo (in Japanese).
- Architectural Institute of Japan (2002). "Design Standard for Steel Structures", Maruzen, Tokyo (in Japanese).
- Akiyama, S. (1988). "Study on Space Frame by 3-D Tubular Rahmen-Part: 2 Test on Tubular T-Joint under Bending", AIJ Annual Meeting: S63.10, pp. 1167-1170.

ORIGINALITY REPORT

11%

SIMILARITY INDEX

7%

INTERNET SOURCES

6%

PUBLICATIONS

1%

STUDENT PAPERS

PRIMARY SOURCES

- | | | |
|--|---|--|
| <div style="background-color: #c00000; color: white; width: 30px; height: 30px; display: flex; align-items: center; justify-content: center; margin-bottom: 10px;">1</div> | <p>Shiro Kato, Tetsuo Yamashita, Shoji Nakazawa, Yun-beom Kim, Atsushi Fujibayashi. "Analysis based evaluation for buckling loads of two-way elliptic paraboloidal single layer lattice domes", Journal of Constructional Steel Research, 2007</p> <p>Publication</p> | <div style="font-size: 2em; font-weight: bold;">4%</div> |
| <div style="background-color: #c00060; color: white; width: 30px; height: 30px; display: flex; align-items: center; justify-content: center; margin-bottom: 10px;">2</div> | <p>io.ppijepang.org</p> <p>Internet Source</p> | <div style="font-size: 2em; font-weight: bold;">3%</div> |
| <div style="background-color: #600060; color: white; width: 30px; height: 30px; display: flex; align-items: center; justify-content: center; margin-bottom: 10px;">3</div> | <p>www.koreascience.or.kr</p> <p>Internet Source</p> | <div style="font-size: 2em; font-weight: bold;">2%</div> |
| <div style="background-color: #006090; color: white; width: 30px; height: 30px; display: flex; align-items: center; justify-content: center; margin-bottom: 10px;">4</div> | <p>Kato, S.. "Analysis based evaluation for buckling loads of two-way elliptic paraboloidal single layer lattice domes", Journal of Constructional Steel Research, 200709</p> <p>Publication</p> | <div style="font-size: 2em; font-weight: bold;">2%</div> |
| <div style="background-color: #008040; color: white; width: 30px; height: 30px; display: flex; align-items: center; justify-content: center; margin-bottom: 10px;">5</div> | <p>Submitted to Monash University</p> <p>Student Paper</p> | <div style="font-size: 2em; font-weight: bold;">1%</div> |

Exclude quotes On

Exclude matches < 1%

Exclude bibliography On